


Historic, archived document

Do not assume content reflects current scientific knowledge, policies, or practices.

DC BRANCH

1
Ag 84F
cp. 3

Feedlot and Ranch Equipment for Beef Cattle

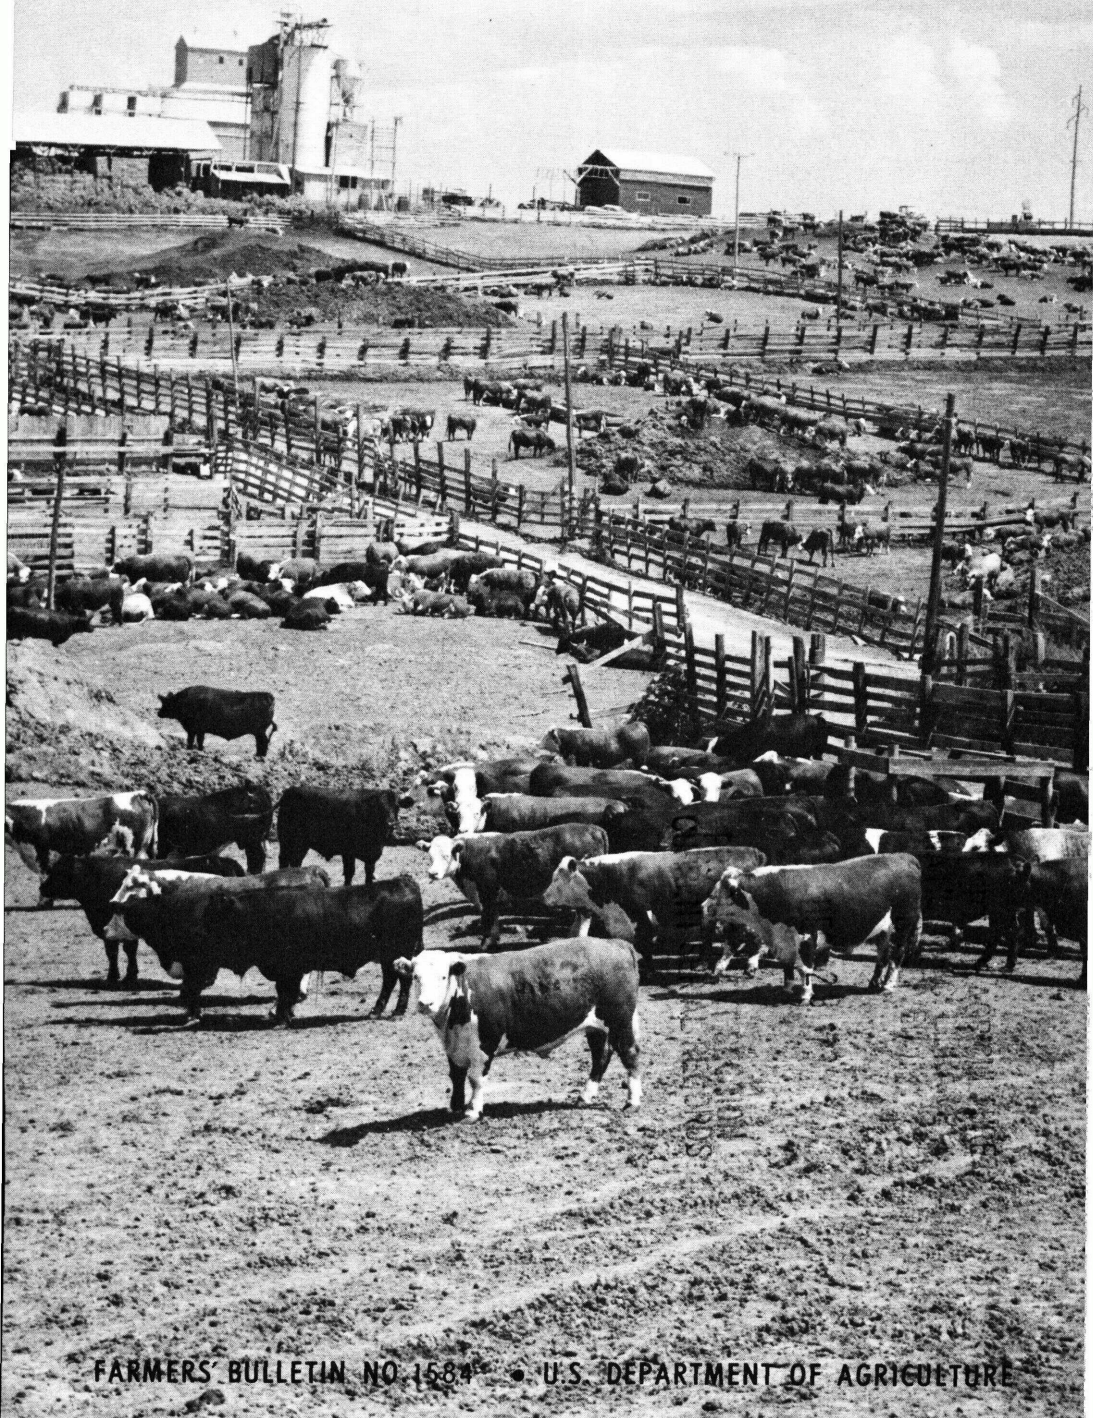

CONTENTS

	Page
Pasture or range equipment shelter	2
Sheds	2
Shade Shelters	2
Wind breaks	3
Back rubbers	3
Cattle guards	4
Feedlot equipment	5
Silos	6
Feeding equipment	8
Troughs	8
Hay	9
Water tanks	9
Corral equipment	10
Scales	11
Chutes	13
Loading chute	16

Washington, D.C.

Revised August, 1973

For sale by the Superintendent of Documents, U.S. Government Printing Office
Washington, D.C. 20402—Price 25 cents
Stock Number 0100-02764

FEEDLOT AND RANCH EQUIPMENT FOR BEEF CATTLE


By D. F. STEPHENS, Superintendent, *Fort Reno Livestock Research Station, Agricultural Research Service, El Reno, Oklahoma*

Proper equipment and housing are important in a successful beef cattle operation. These items need not be elaborate or expensive, but should be practical and designed in such a way as to provide maximum safety to both man and animal.

Shelters, shades, windbreaks, corrals, fences, and many other animal handling facilities may be designed and constructed on the farm or ranch. Many stockmen prefer durable wooden materials for construction of routine buildings and equipment.

In areas where used pipe, tubing, steel cable, and other construction metals are available, at a reasonable cost, such items are widely used as construction materials. In addition to durability, metal construction offers the additional advantage of greater strength, and when properly designed, greater safety.

Many farm and ranch operators possess metal working and welding skills. When such skills are available, the design and construction of many animal handling items can

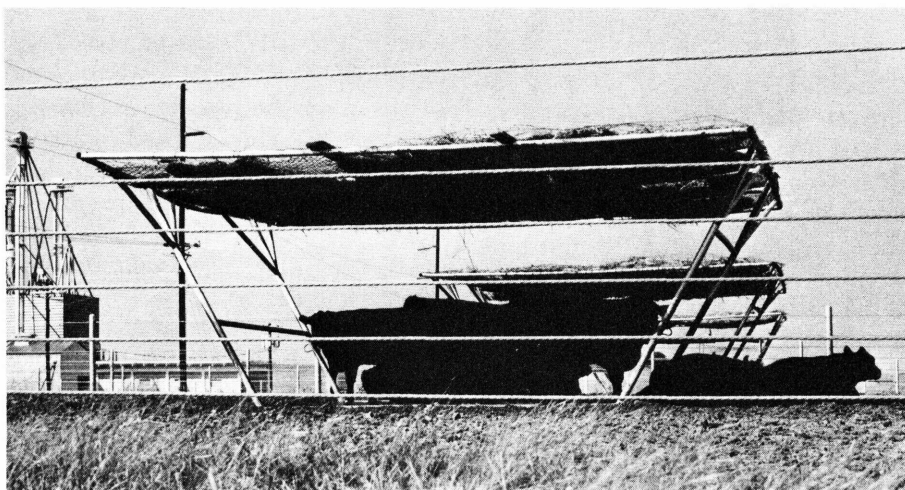

N-54081, 71-763

Figure 1.—Shade shelter constructed of wire and pipe in a commercial feedlot.

be done on the farm and ranch. In many cases salvaged metal pipe, tubing, and other construction materials can be used to good advantage.

Animal handling items such as working chutes, headgates, and calf tables, are available from commercial manufacturers. These items are usually well constructed from durable metals. In some cases, they may be more satisfactory and economical than shop-made equipment.

PASTURE OR RANGE EQUIPMENT SHELTER

Sheds

Beef animals should be adequately protected from extreme cold and humid conditions. In warmer and less humid climates, natural shelters such as timber, embankments, and canyons, usually provide adequate protection.

Mature beef animals require approximately 40 square feet of shelter space per head, whereas, calves and yearlings will need 20 to 30 square feet per animal. Beef animals do not require a closed shelter, except under extreme weather conditions. Open sheds, located on well-drained areas with a southern exposure are most desirable.

Pole-type construction is adequate and is usually more economical than structures made with concrete or masonry foundations. Standard wood or metal siding is normally used on three sides of the

shed. When metal siding is used, adequate framing should be provided to protect the metal from crowding by animals.

Conventional roof types that provide adequate protection and resistance to wind and other stresses are recommended. It is a good idea to include a standard metal roof gutter along the open portion of the shed.

Because shelter sheds serve as shade areas during the summer months it is helpful to make openings in the closed sections to facilitate air movement.

A desirable shelter shed can be constructed by enclosing one end and only a portion of one side wall. Normally, on a shed with a southern exposure, the western end and a portion of the northern side would be closed. The remaining portion of the shed will provide suitable shade in areas that lack natural shade.

Feedlot cattle, on full feed, require considerably less protection from low temperature than do stocker animals. Shelter sheds, as described above, are usually adequate in northern and midwestern sections of the United States. However, feedlot operators in the southern and southwestern areas normally make no provision for shelter of their animals during winter months.

Shade Shelters

Shade is important in either feedlots or pastures where summer temperatures reach 80° to 85° F. In many pastures shade from trees is adequate. In the absence of trees, some form of artificial shade is

desirable, if animals are to maintain normal growth and fattening rates.

Shade shelters should be located so as to take advantage of normal wind movement. An elevated ground area with the shade roof being located 10 to 12 feet above ground level is desirable. The roof of the shade shelter may be made from low quality cured roughages such as straw or hay. Such material will normally require replacement on an annual basis.

Durable roof material such as new or used metal roofing will provide a more permanent shade roof. The application of a reflective paint to a metal roof will increase its effectiveness and add to its durability.

Windbreaks

In northern and western plain states, windbreaks offer protection for beef animals during winter months. Where natural occurring windbreaks, such as timber and earth embankments, are present they are usually adequate. When

natural protection is not available some form of artificial windbreaks is desirable. A suitable windbreak can be constructed by building an 8-foot-high wall from either wood or metal. Normally, a wall along a portion of north and west side is preferred to a wall on only one side of the lot.

Support framework for windbreaks should be adequate to withstand both wind stress and animal crowding. Six-inch pressure-treated wood posts or 3- or 4-inch pipe, 8 feet in length, is usually suitable to support a windbreak fence. Wood posts should be set 3 feet in the ground 6 to 8 feet apart. Pipe posts have greater stability if set in concrete.

Back Rubbers

Moderate control of horn flies and cattle lice can be accomplished by the use of simple back rubbing devices treated with an approved insecticide. A simple applicator that animals will use can be constructed on most farms and ranches.



Figure 2.—Shade shelter suitable for feedlot or pasture areas.

BN-11592

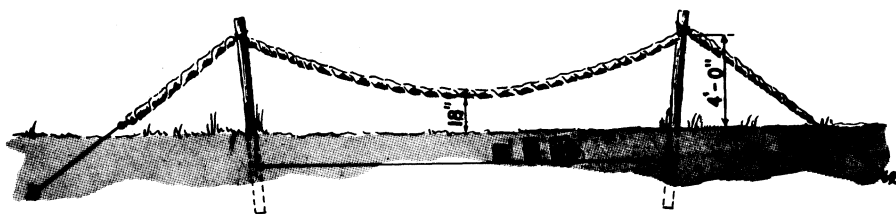


Figure 3.—Back rubber.

BN-11563

Materials for construction of back rubbers include two 7-foot fence posts and suitable length of chain or wire cable. Set the posts 15 to 20 feet apart and approximately 3 feet in the ground. Securely fasten the chain or cable approximately 4 feet above ground level. Allow chain or cable to sag to within 18 inches of the ground at the center.

Anchor the post securely to a "deadman" opposite the chain or cable. Wrap the chain or cable with several thicknesses of burlap and tie securely with heavy cord or wire. Saturate the burlap weekly with an approved insecticide during periods when flies and cattle lice are a problem.

Commercial cattle oilers and dust applicators are available from standard manufacturers. Many styles and forms are available and when properly used are satisfactory.

The back-rubbing device should be located in an area of the pasture where the animals frequently gather. Artificial shades or watering areas are good location sites for the device. The back rubber should be located in an area that is protected from the direct sunlight.

To maintain normal control of either horn flies or cattle lice with these devices, attention must be given to the condition of the applicator weekly. In cases of extreme insect population other methods of control may be required.

Cattle Guards

Cattle guards or auto gates, located between pastures or confinement areas on frequently traveled roads, save time and labor. They permit passage of ordinary motor vehicles, whereas most livestock will not attempt to cross the guard. When a cattle guard is located on roads where animals are normally moved from one pasture to another, a standard gate should be located nearby so as to permit passage of the livestock.

Cattle guards may be constructed from treated timbers or more durable materials. In areas where used pipe or tubing is available, such items are widely used to construct durable cattle guards. Also discarded railroad rails are sometimes used.

Cattle guards should be large enough to provide adequate passage of motor vehicles and to turn

CAUTION

Paint containing lead should not be used as a preservative on cattle equipment or on buildings that are accessible to the cattle. Lead poisoning may result when animals lick or chew objects painted with lead-containing paints. Young animals are especially susceptible. Oxidized lead paints are attractive to calves and may cause many unexplained calf losses.

livestock. A well-drained pit beneath the guard is desirable. This aids in maintenance and in preventing livestock from attempting to cross the structure.

FEEDLOT EQUIPMENT

The establishment of large-capacity cattle feeding facilities in the west and southwest in recent years

has resulted in marked changes in cattle feedlots. Furthermore, the effect of large numbers of animals on air and water quality has led to a reassessment of the location, design, and development of feedlots.

There are basic elements in the design and location of feedlots that are important regardless of size. The location should be well drained, convenient to feed supply and readily accessible to mechanized equipment. Consideration must be given to the possible pollution effect of runoff water on the surrounding water shed and natural waterways.

Rectangular shaped lots require less pavement than odd-shaped lots. In the event only a portion of the lot is to be paved, a 12-foot slab located in front of the feed bunks and water troughs is desirable.

Concentrate feeds and chopped roughages are normally fed from self-unloading feed wagons or trucks. Mechanical conveyors are



Figure 4.—Metal cattle guards constructed from piping.

BN-39370

in limited use. When these are used, the shelter used to protect the equipment may also serve as a feed bunk shelter as well as shade shelter in summer months.

Fence-line feed bunks are most convenient and eliminate the need to put feeding equipment in the feedlot. When self-feeders are used, they can be located adjacent to the roadway so that they may be filled by mechanical equipment.

When a fence-line bunk feeder is used, each animal should be allowed 22 to 28 inches of trough space. When using a self-feeder, 12 inches of bunk space is adequate.

Silos

Silos, either permanent or temporary, are important equipment items in cattle feeding. Such structures permit the harvest and storage of maximum amounts of

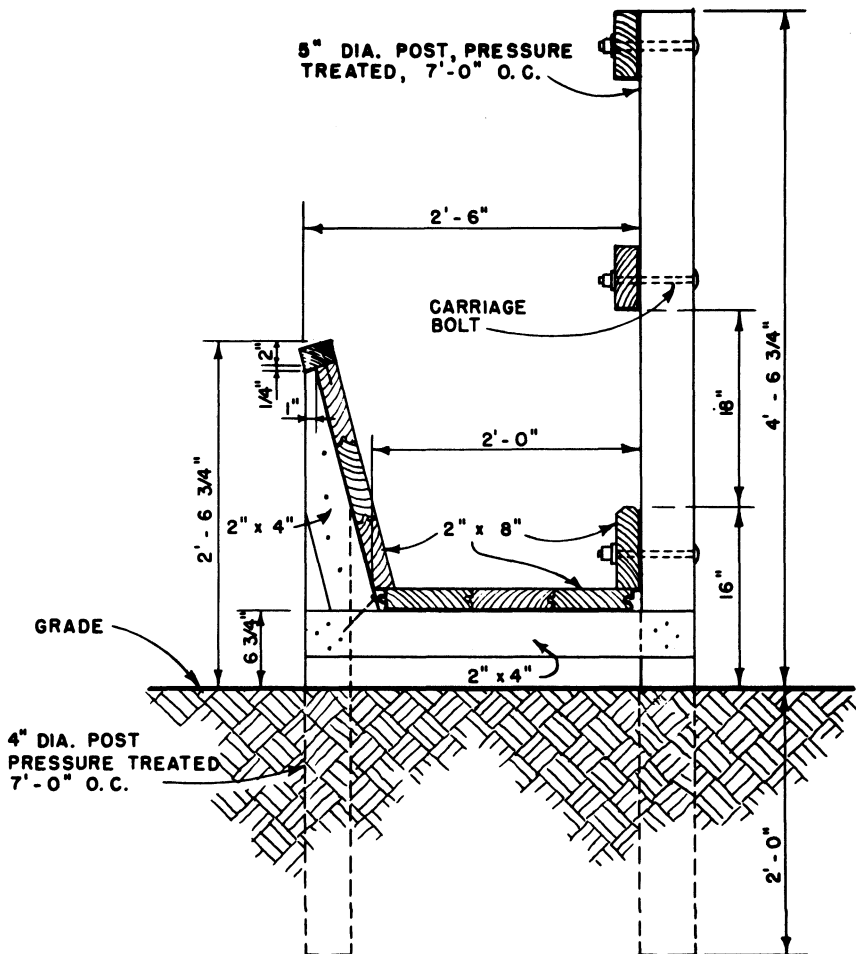


Figure 5.—Fence-line bunk construction detail.

BN-11569

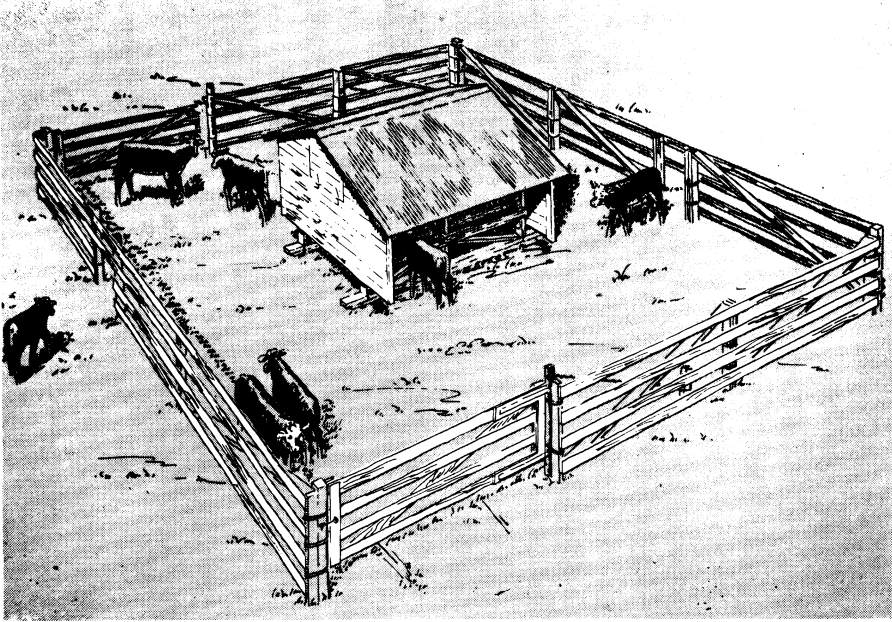


Figure 6.—Calf creep and portable self-feeder.

BN-11575


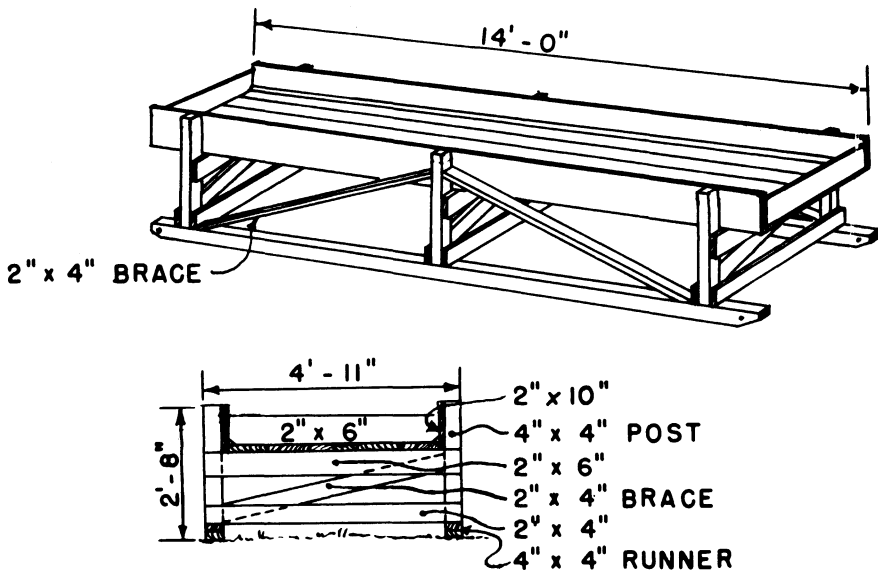


Figure 7.—Portable feed bunk.

BN-11557

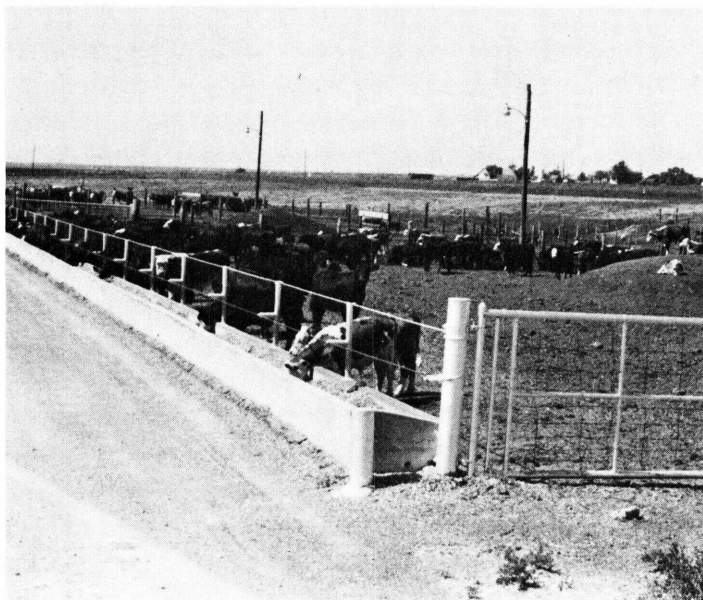

2917

Figure 8.—Fence-line feed bunk.

plant material and thereby provide an excellent source of high-quality forage.

Permanent-type silos include upright and permanent walled trenches. This kind of structure provides for permanent storage with a minimum waste of forage. Temporary silos are ordinarily used to store limited quantities of forage for immediate use. These include bunkers, lined snow fence, and simple above-ground stacks of silage. Unless storage facilities are properly constructed and maintained, spoilage and waste of forage can be excessive.

Silos should be located on well-drained sites. This is especially important with trench and bunker stock silos.

Feeding Equipment

Self-feeders are designed to provide a continuous supply of high-quality nutrients for the beef animal at all times. They are most commonly used as calf "creep feeders" and sometimes are used in fattening operations.

Troughs

Portable feed troughs or bunks built on skids so that they can be easily moved are preferable to stationary troughs for small farms and ranches.

Feed troughs should be well braced. They should be wide enough and deep enough to prevent feed waste. For troughs, use the most durable lumber available. Care

should be exercised in selecting treated lumber in order to avoid lumber treated with poisonous materials.

Bunk skids and support timbers near the ground should be pressure treated. Materials for the trough floor should be well-cured lumber.

For large feedlot operators, fence-line bunks that can be filled by mechanized feeding equipment are most desirable. Concrete is the most desirable construction material for such bunks. Pre-cast concrete troughs are available and in many situations are more economical than poured concrete fence-line bunks.

Hay

Under range conditions hay is usually scattered about on the ground. Where animals are restricted to specific areas, the use of a well-designed forage rack will result in better utilization of the forage. Forage racks can be constructed from durable lumber or construction metal.

Under certain conditions a combination feed bunk-hay rack is desirable. Hay racks inside shelters should be located so that they can be filled from the hay storage area or from equipment used to haul forage.

Water Tanks

An adequate water supply is essential to a beef cattle operation. The beef animal will consume from

5 to 15 gallons of water per day, depending on the size of animal, feed supply, and weather conditions. Water tanks should be located so that they are easily accessible to animals of all ages. Tanks located in the corner of a lot or pasture may serve several groups of cattle.

Water tanks are commonly made from galvanized metal or poured concrete. Metal tanks are usually movable from one location to another. Poured concrete tanks are more permanent and durable. Where large quantities of water must be stored, as on ranches where water is pumped from wells by windmills, a large supply tank is necessary. Smaller tanks to serve the animals are connected to the supply tanks.

When the water supply is obtained from standard pressure lines, automatic float valves are frequently used to provide a constant water level in the tanks. Such valves usually require a protective guard to avoid damage by animals.

The water tank should be located on a well-drained site to avoid mudholes and facilitate draining and cleaning.

Soil erosion frequently occurs in the area immediately surrounding the water tank. To assure all animals access to a water supply it is often necessary to refill or build up the soil around the tank. This erosion can be prevented by pouring a 3- to 4-inch concrete slab 6 to 8 feet wide around the tank.

The shape of the water tank is determined by the desire of the stockman. Round tanks require somewhat less material and help to avoid animal crowding.



BN-15505

Figure 9.—Concrete watering tank.

In cold climates, tanks should be located in a protected area to minimize freezing. In areas of severe cold, tanks should be equipped with a heating device to ensure animals a ready source of water.

CORRAL EQUIPMENT

The design of the corral will depend on the kind and number of cattle to be handled, as well as the type of farm or ranch. For the conventional farm herd, the corral may be designed as a part of the farm barnyard. On large ranches, or where large numbers of cattle

of all kinds are to be handled, the corrals should be designed and located so as to facilitate the efficient movement of large numbers of cattle in a short time.

The corral design should include provisions for a working chute, squeeze chute and headgate, loading chute, areas for treating and spraying animals, and a dependable set of scales. A sorting or cutting alley adjacent to the holding pens is a desirable feature when large numbers of animals are to be handled.

The physical site of the corrals should be determined by pasture location and arranged to work as many groups of cattle as possible

through a common facility. The corral site should be well drained and provide shade as well as protection from winter weather.

Materials to construct the corral fence will vary from section to section of the country. Wooden poles and conventional dimension lumber is the most commonly used material. In areas where suitable metal materials are available at a reasonable cost, a very attractive and durable set of corrals can be constructed from used pipe, tubing, and related materials. Post for corral fences must be very durable.

Pressure-treated wooden posts 6 inches or more in diameter and 8 to 10 feet long are recommended. These should be set 3 feet in the ground. The fence height will depend on the kind, number, and temperament of animals to be han-


dled. A 5½ or 6-foot fence will be adequate for most beef animals.

If dimension lumber is used, the planks should be placed on the animal side of the post. Lumber is commonly fastened to the post by heavy nails or bolts. In areas of stress, such as corners and gates, bolts or lag screws are often used to provide additional strength.

Gates should be strongly built, well braced, and hung so as to move freely. Either wooden or metal gates can be used with primary considerations being strength and durability.

Scales

A livestock scale is a valuable item of equipment for beef cattle producers. It is a necessity when the buying and selling of animals is based on farm or ranch weights.

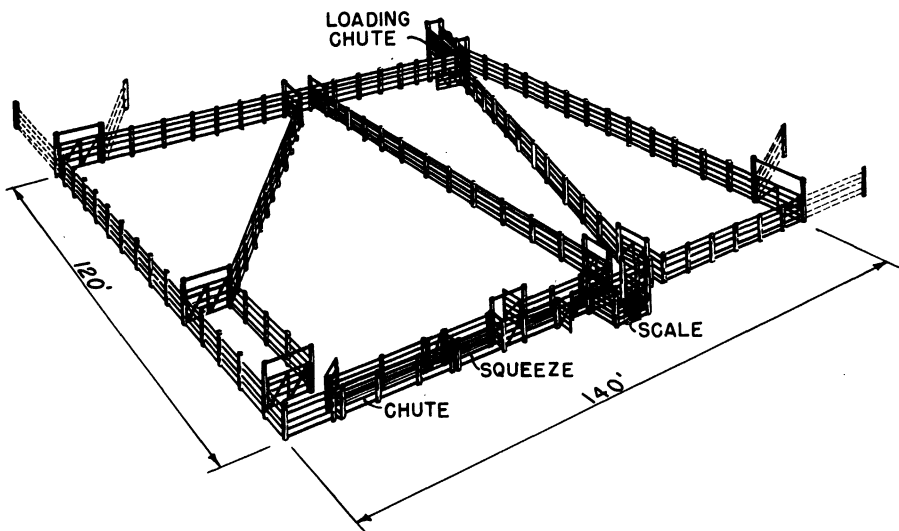

BN-11572

Figure 10.—Corral system for use where a small number of cuts is required.



BN-11582

Figure 11.—Corral system for large numbers of cattle.



BN-11590

Figure 12.—Portable scales are valuable for weighing individual animals.

The scales should be located so that animals can be easily moved to and from them for weighing. Most stockmen prefer to locate the scale in or adjacent to the working pens and loading chutes.

ther as a portable unit or for permanent installation. If the stockman is to obtain accurate and reliable weights of his livestock, the installation, care, and service on a scale unit is very important.

A well-designed working chute is one of the best investments a cat-



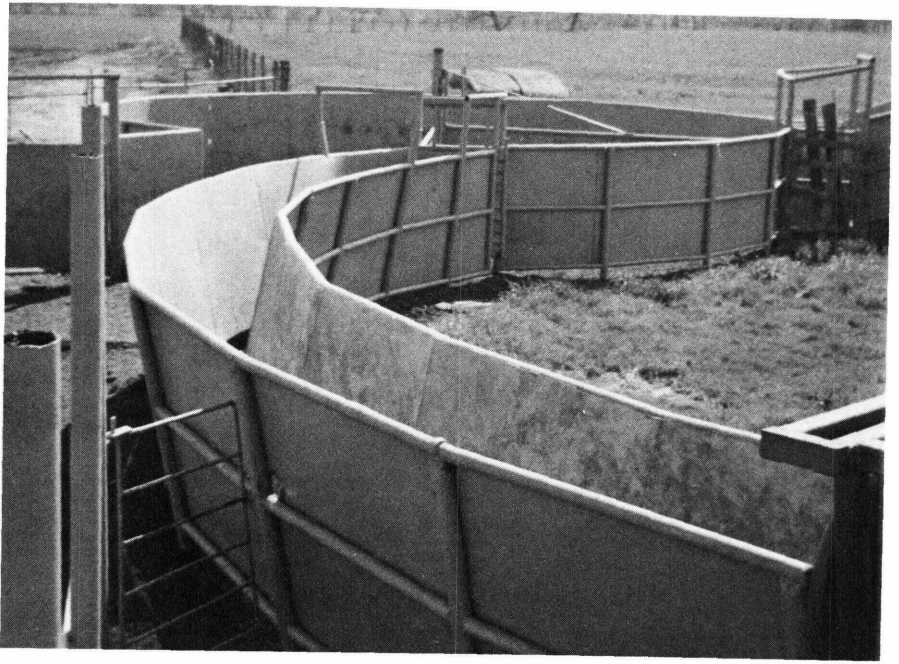


Figure 14.—Curved chute.

BN-39369

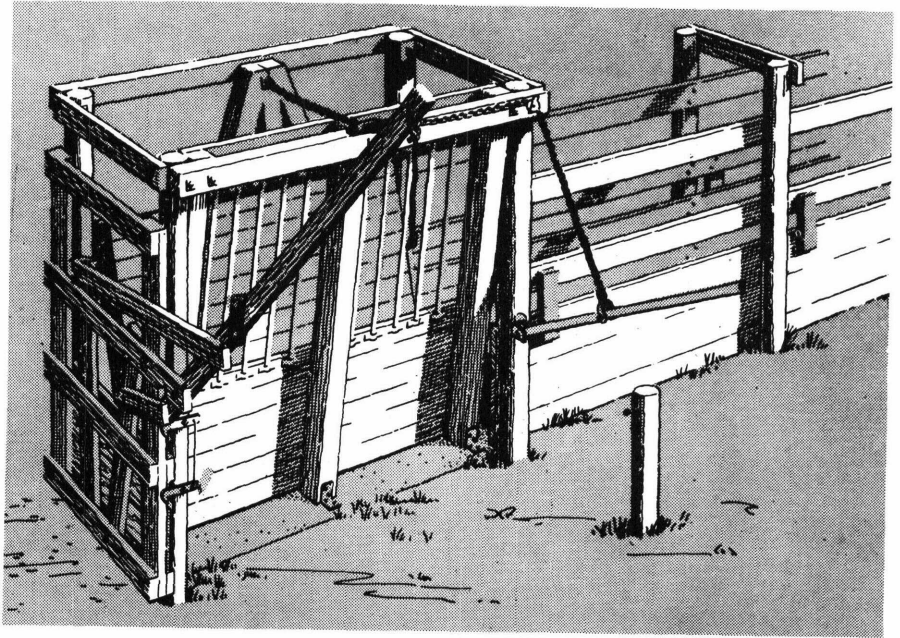


Figure 15.—Squeeze chute with headgate. This type of chute is suitable for dehorning.

BN-11570-X

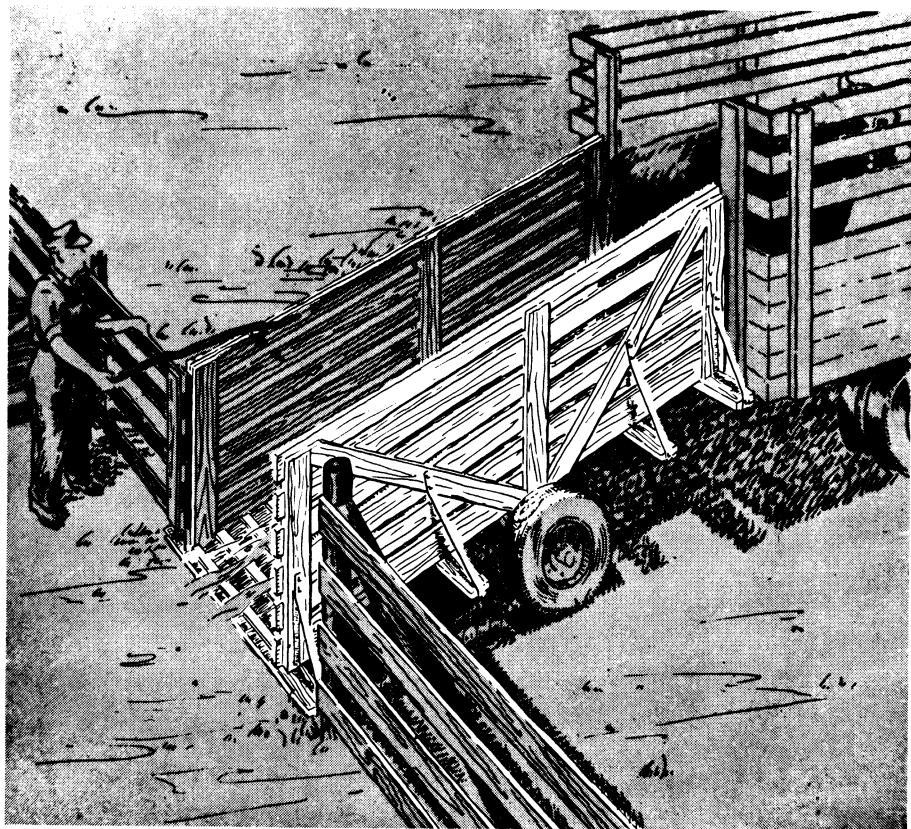


Figure 16.—Portable loading chute.

tleman can make. It contributes to the safe and easy handling of animals. It assures safety to the person engaged in treating the livestock. The working chute is constructed as a part of the animal-handling corral. The overall dimensions are determined by the number and size of animals to be handled.

The chute should be long enough to hold six or more mature cattle. When handling large numbers of animals, a chute that is slightly curved will facilitate the movement of stock. When both calves and mature animals are to be handled,

a design in which the chute is narrow at the bottom and wider at the top will prevent younger animals from turning around in the chute.

Many routine vaccinations or treatments can be administered when animals are restrained in the ordinary chute. However, close examination, surgical operations, securing blood samples, internal treatment, and branding may require more complete restraint than is possible in a standard chute. In such cases, a squeeze chute located


at the terminal end of the standard working chute is most desirable.

Many commercial beef cattle equipment companies specialize in designing and building sturdy, fast-acting, all-metal squeeze chutes. These are needed for large cattle operations, but for smaller farm herds a safe squeeze chute and headgate can be constructed from dimension lumber.

A chute built with a side exit gate is convenient. When animals go down in the chute the side exit permits the freeing of the animal with a minimum of effort.

Loading Chute

The modern beef animal may travel as much as 2000 miles from place of birth to where it is finally processed. It is frequently loaded and unloaded from transportation equipment; therefore, a safe, sturdy, well-lighted, easily accessible loading chute is a very essential

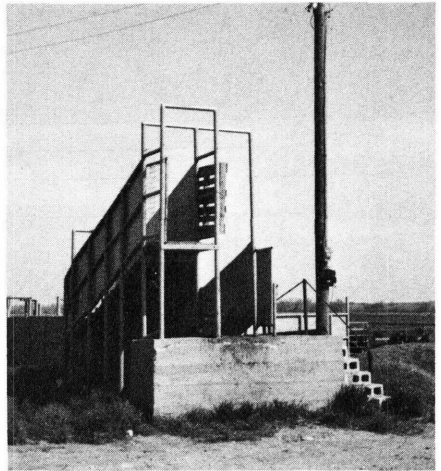

2918

Figure 17.—Metal and concrete loading chute.

part of beef cattle equipment. The loading chute can be portable; however, a permanent chute with ample room for easy truck approach on an all-weather road surface is more functional.



BN-39367

Figure 18.—Concrete loading platform with metal evener.

A loading chute is commonly constructed from dimension lumber. The ramp should have two layers of dimension lumber with cleats placed 6 to 8 inches apart to prevent animals from slipping or falling. A concrete dock with an earthen ramp makes a very satisfactory loading chute. Animals will

lead much more rapidly walking up the earth-filled ramp.

Good beef cattle equipment, well maintained, will provide safe working conditions for both the operator and the livestock. Likewise, good equipment will make the cattle operation more efficient and provide the operator with greater personal satisfaction.

**U. S. DEPARTMENT OF AGRICULTURE
AGRICULTURAL RESEARCH SERVICE
HYATTSVILLE, MARYLAND 20782**

**OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, \$300**

**POSTAGE AND FEES PAID
U. S. DEPARTMENT OF
AGRICULTURE
AGR 101**

